



LSCF fibers for IT-SOFCs applications: synthesis and morphological analysis

Enrico, Anna ; Zhang, Wenjing (Angela); Traulsen, Marie Lund; Aliakbarian, Bahar ; Lagazzo , Alberto ; Botter, Rodolfo ; Perego, Patrizia ; Costamagna, Paola ; Holtappels, Peter

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Enrico, A., Zhang, W., Traulsen, M. L., Aliakbarian, B., Lagazzo , A., Botter, R., Perego, P., Costamagna, P., & Holtappels, P. (2016). *LSCF fibers for IT-SOFCs applications: synthesis and morphological analysis*. Abstract from ELeCtrospinning for ENergy Conference, Montpellier, France.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

LSCF fibers for IT-SOFCs applications: synthesis and morphological analysis

Anna Enrico^a, Wenjing Zhang^b, Marie Lund Traulsen^b, Bahar Aliakbarian^a, Alberto Lagazzo^a, Rodolfo Botter^a, Patrizia Perego^a, Paola Costamagna^{a*}, Peter Holtappels^{b*}

^a Department of Civil, Chemical and Environmental Engineering, University of Genoa
Via Opera Pia 15, 16145 Genoa, Italy

^b Department of Energy Conversion and Storage, Technical University of Denmark,
Risø Campus, Frederiksborgvej 399, DK-4000 Roskilde, Denmark

* peho@dtu.dk; paola.costamagna@unige.it

The electrospinning technique offers several advantages for IT-SOFC applications: the large variety of 1D-structures that could be obtained allows to tailor the microstructure of the electrode which gets unique properties, such as high surface area, porosity and continued charge transfer pathways. At the same time, coupling the electrospinning technique with infiltration methods, high electrode performance can be reached even at intermediate temperatures, since this kind of structures can accommodate large amounts of infiltrations.

We have investigated the tailoring of the electrode microstructure and the content and distribution of infiltrated particles both from an experimental and a modelling point of view. We have synthesized $\text{La}_{1-x}\text{Sr}_x\text{Co}_{1-y}\text{Fe}_y\text{O}_{3-\delta}$ (LSCF) fibers through the electrospinning method. We have investigated the formation of nanofibers as function of the operating parameters, i.e. the applied voltage, the solution properties and feeding rate. The influence of these parameters on the fibers morphology has been examined, as well as the effect of the sintering procedure. Figure 1 below displays our LSCF electro-spun fibrous scaffolds. The fibers, initially of diameter around 500nm (Figure 1a), are broken by heat treatment, resulting similar to nanorods (Figure 1b).

We have investigated from a modelling point of view the effect of infiltrations on LSCF fibers and we have analyzed the electrochemical properties and performance of the electrode depending on the infiltration loading. LSCF is a mixed ionic electronic conductor (MIEC), and thus the fibrous scaffold provides continuous pathways for both electrons and oxygen ions through the SOFC electrode. Despite this, literature experimental results show that its performance as an electrode material is rather low (overall electrode resistance $R_p \approx 4 \times 10^{-4} \Omega \text{m}^2$ at 863K), unless it is infiltrated with dopant materials, such as Gd- and Sm-doped Ceria (GDC and SDC respectively).

Our model results, together with our preliminary experimental data, show that fibrous ceramic materials, synthesized through electrospinning and infiltrated with GDC particles, display interesting features for application in IT-SOFCs.

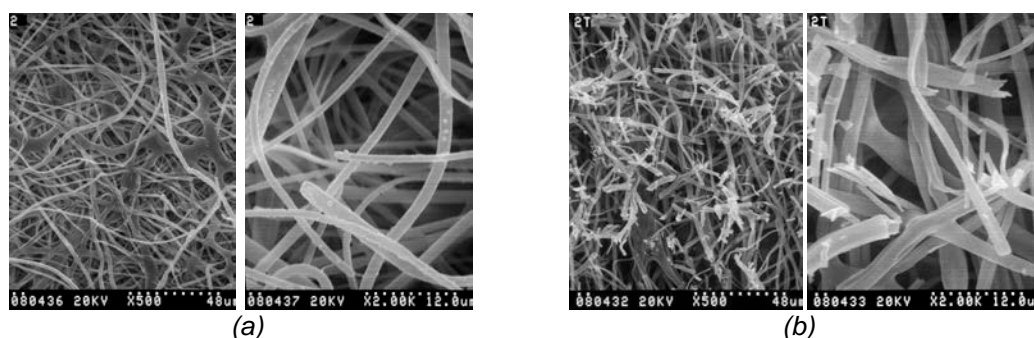


Figure 1: SEM images of LSCF electro-spun scaffolds before (a) and after (b) the heat treatment

REFERENCES

- [1] Enrico A., Costamagna P., *J. Power Sources* 2014, 272, 1106.
- [2] Enrico A., Aliakbarian B., Perego P., Costamagna P., *ECS Trans.* 2015, 68, 857-865.
- [3] ...